



Sony Cyber-shot DSC-W55 Back Case Replacement

Diassembling the back cover of the camera so that we can repair components from the inside.

Written By: kkfong91



INTRODUCTION


Diassembling the back cover of the camera so that we can repair components from the inside.



TOOLS:



- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery

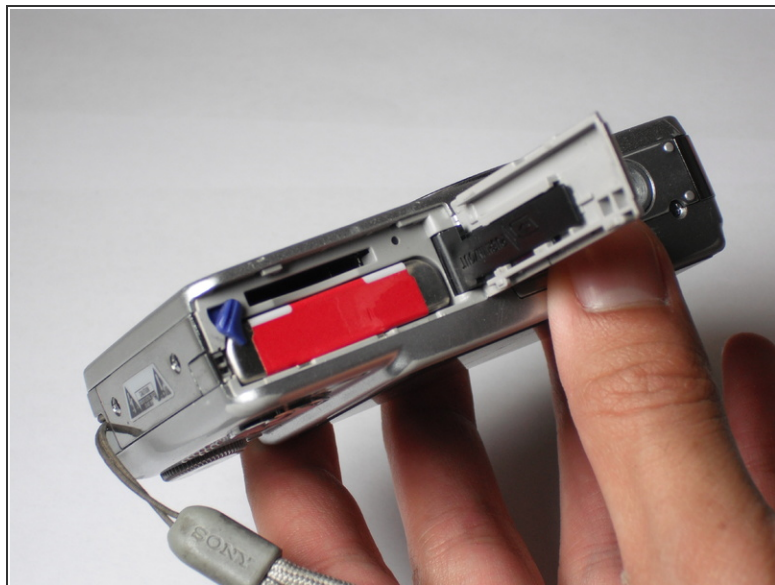



- Slide the battery cover in the direction the arrow points.
- Pull the battery cover towards you.

Step 2

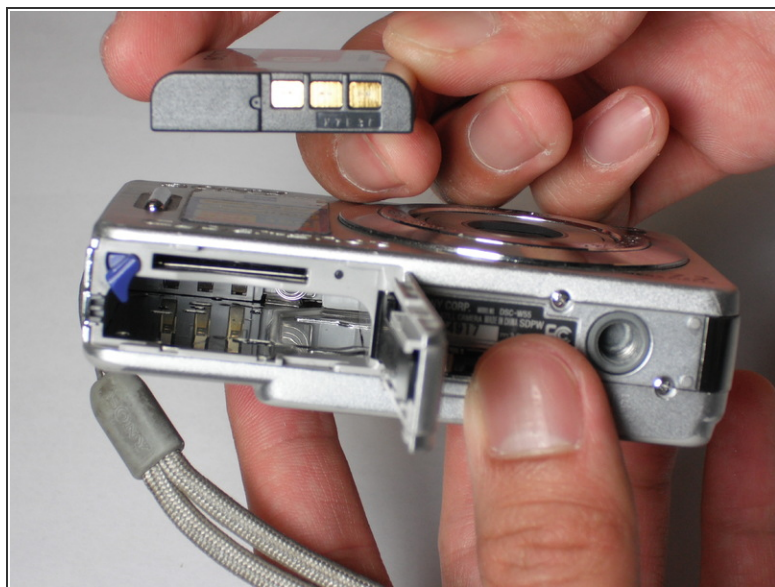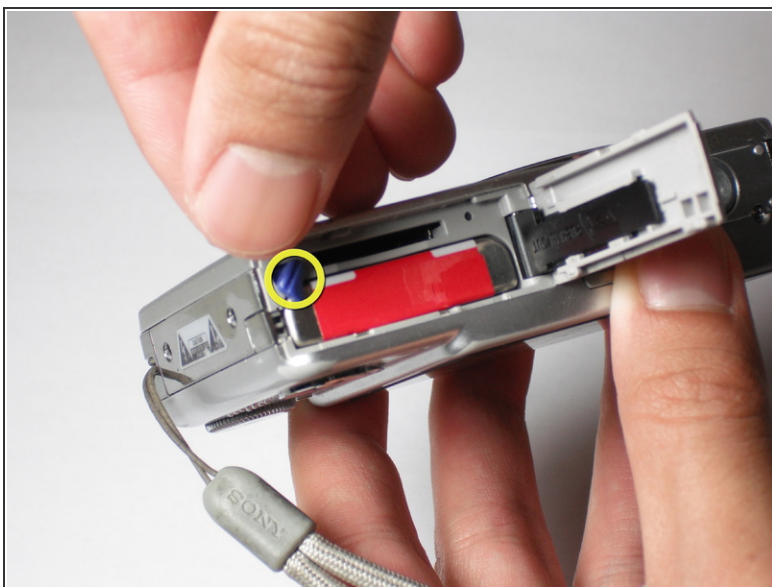

- Flick the blue switch for the battery to pop out.
- Remove the battery from the camera.

Step 3 — Back Case

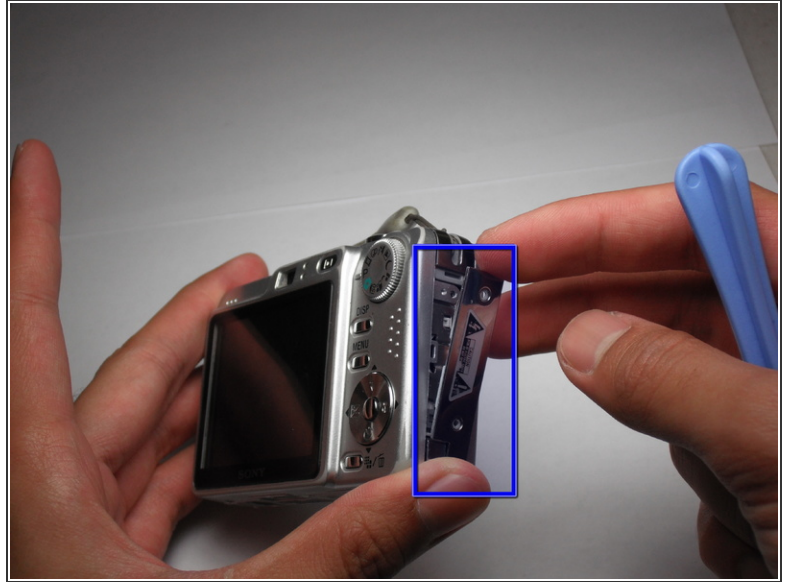
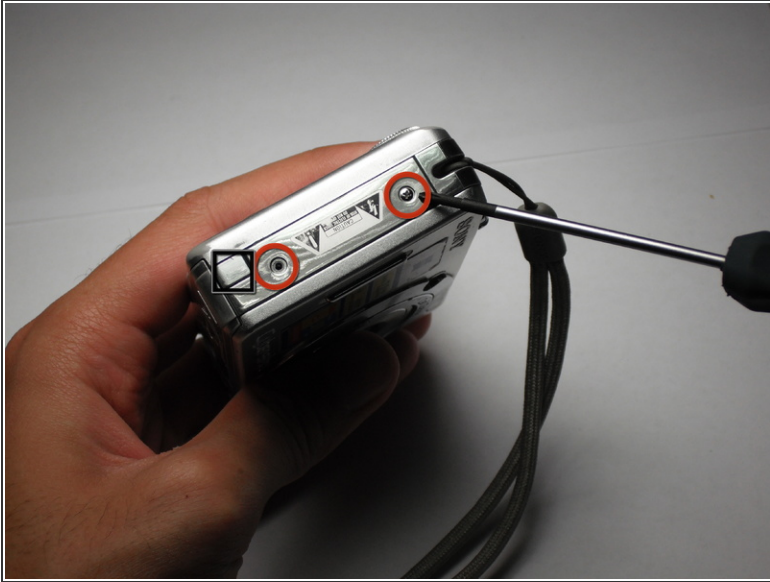


- Using the Phillips #00 Screwdriver, remove the two screws from the caution panel.

- Remove that panel.

⚠ Careful for falling pieces.

Step 4

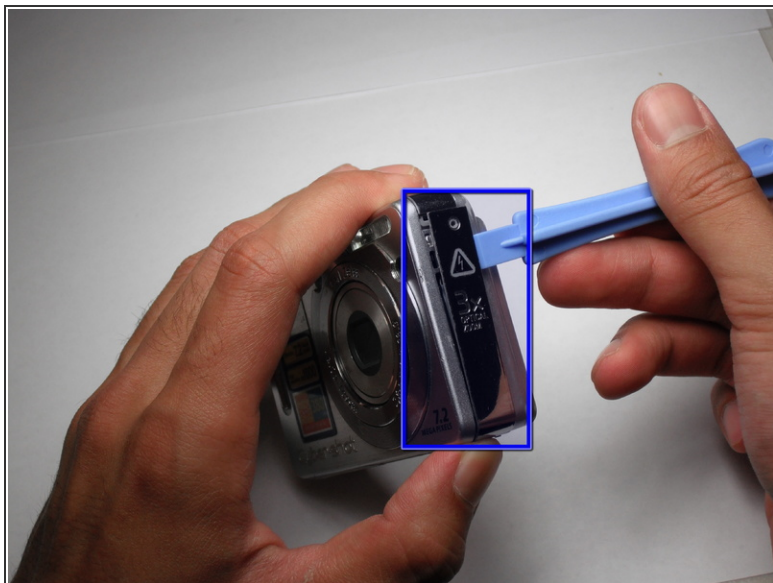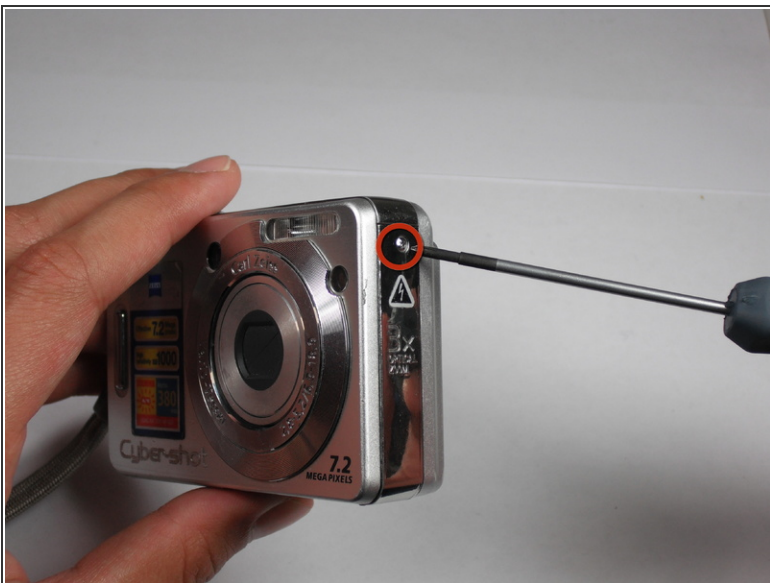


- Remove the screw with a Phillips #00 Screwdriver from the right side of the camera (with '3x optical zoom' engraved on the side panel).
- Remove that panel.

Step 5



- Remove the screw using the Phillips #00 Screwdriver from the bottom the camera, closest to the back cover.

Step 6

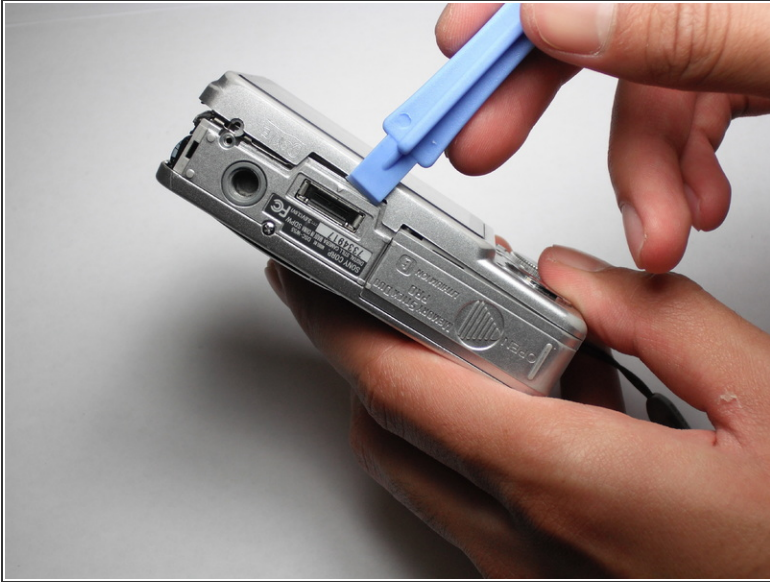

- Gently remove the back cover.

⚠ It may be a bit stiff, so use some force to remove it. Proceed with caution.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:44:45 AM.